



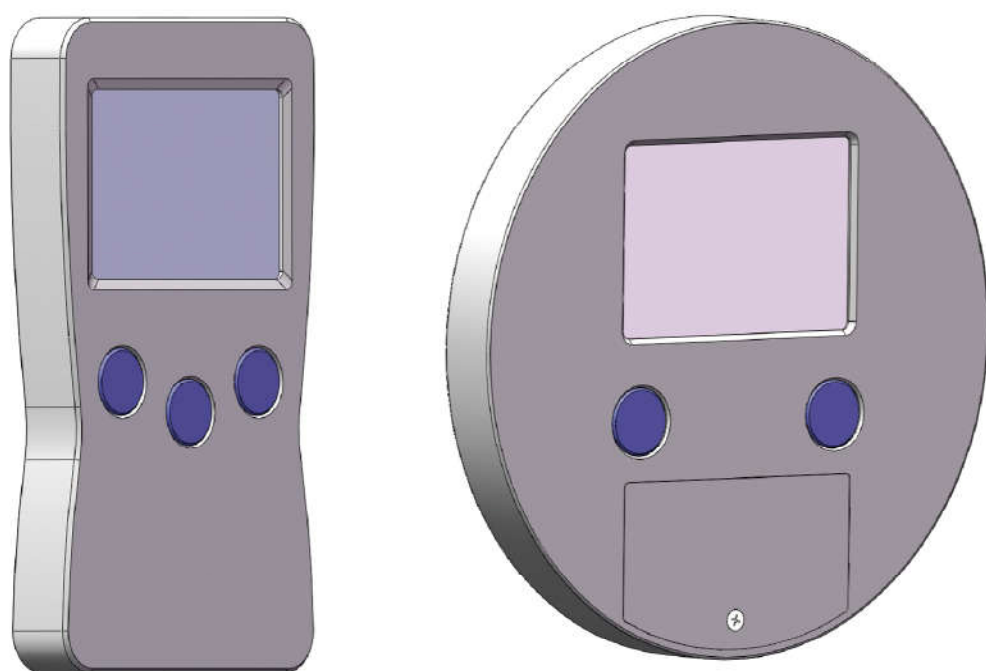

UV 能量计 UV Energy Meter

FP8266 UV能量计

FP8266 UV Energy Meter

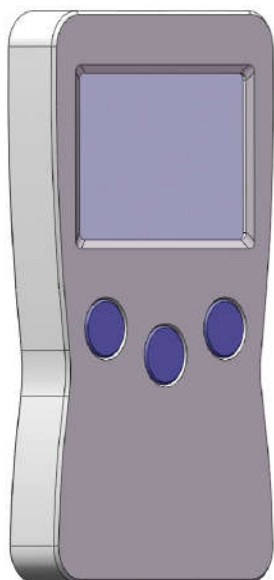

产品信息:

- 专业用于UV LED 光源测试的紫外能量计
- 量程达到40W/cm²的宽量程紫外能量计
- 适用宽光谱（340nm-420nm）范围的紫外能量计
- 同时测量温度和功率，并能显示过程曲线

Product information:



- Professional testing for UV LED light sources.
- It has a wide range of up to 40W/cm².
- Suitable for wide spectral range 340-420nm.
- It can test temperature and power in the meantime.
- And can display process curves.
- Simple in operation and portable.

技术参数



Technical Data

仪器类型	圆形	手持式
仪器适用	UVLED光源的光强度，能量温度的测量	UVLED光固化功率，UV能量的测量
光谱范围	340nm---420nm	
功率测量范围	0---40000 mW/cm ²	0---20000 mW/cm ²
功率分辨率	1 mW/cm ²	0.1 mW/cm ²
能量测量范围	0---999999mJ/ cm ²	0---9999999mJ/ cm ²
能量测量精度	±10%, ±5%典型的	±10%
温度测量范围	-55℃---125℃	-----
取样速度	2048次/秒	-----
功率数据存储间隔	32次/秒	-----
温度数据存储间隔	2次/秒	-----
记录周期	32分钟	-----
适用电源	2节 AAA碱性干电池	
显示屏幕	240*160点阵LCD	
仪器运行环境温度/湿度	0—35℃ 85%(无结露)	

测量原理

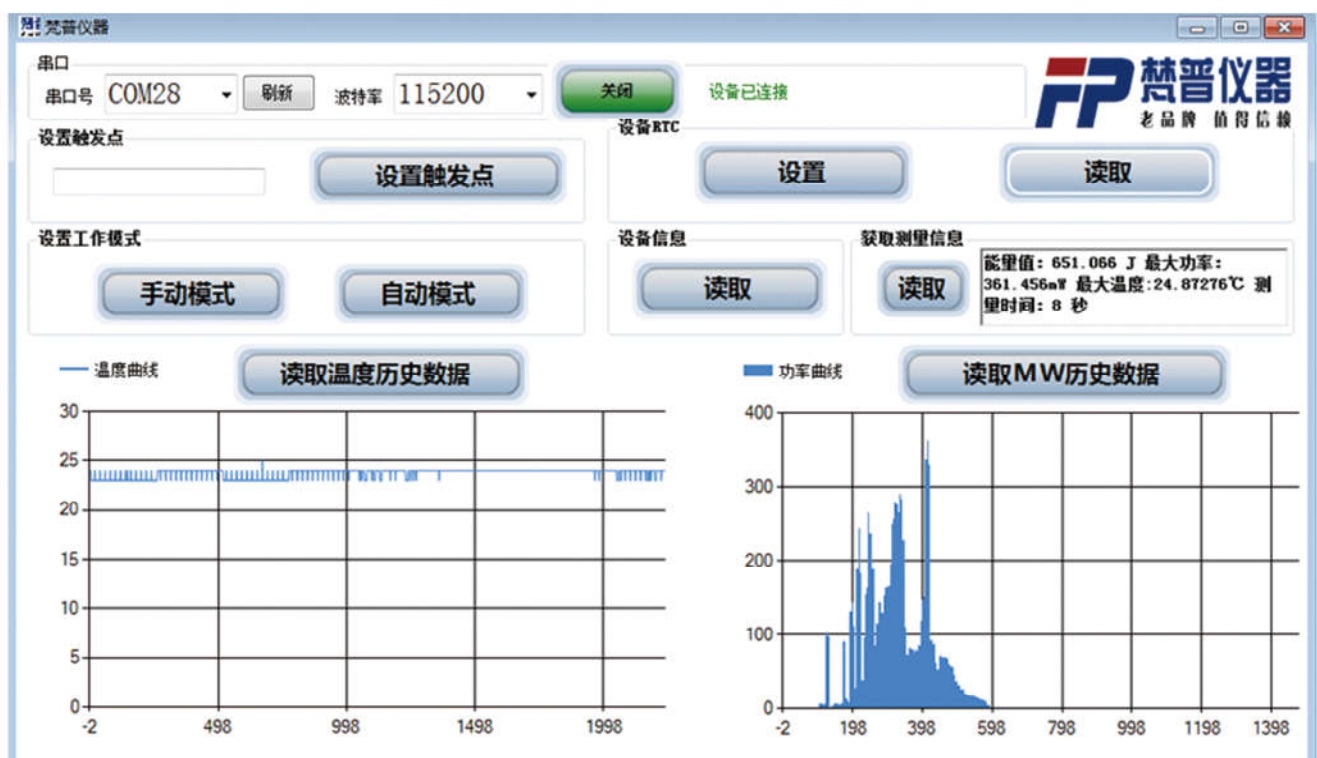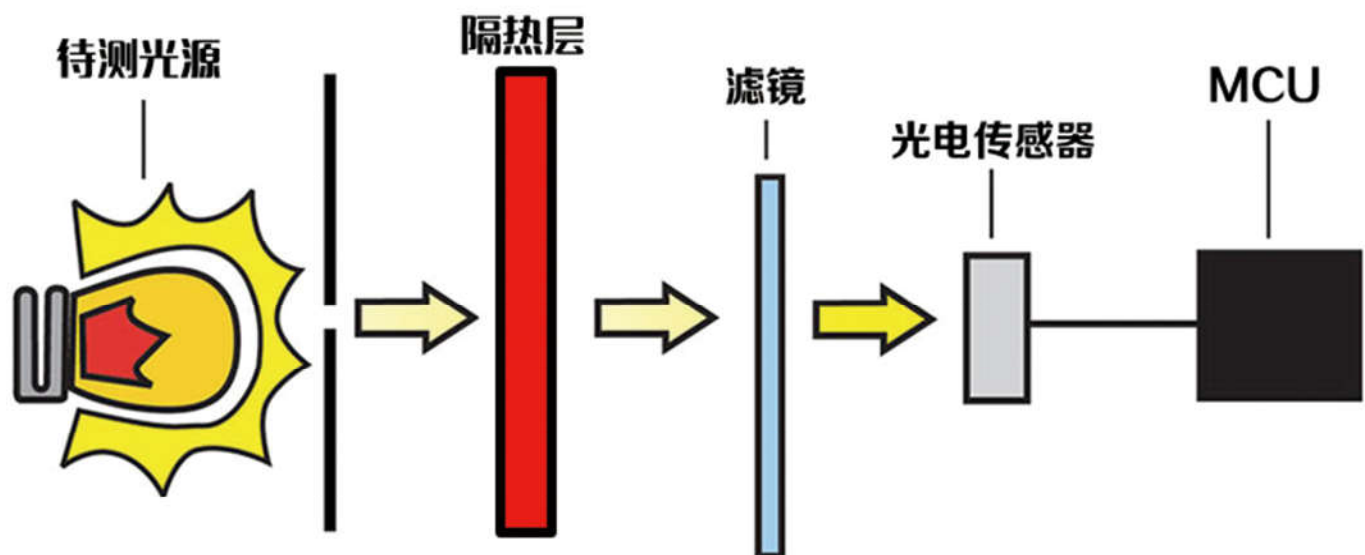

产品结构及光谱曲线图

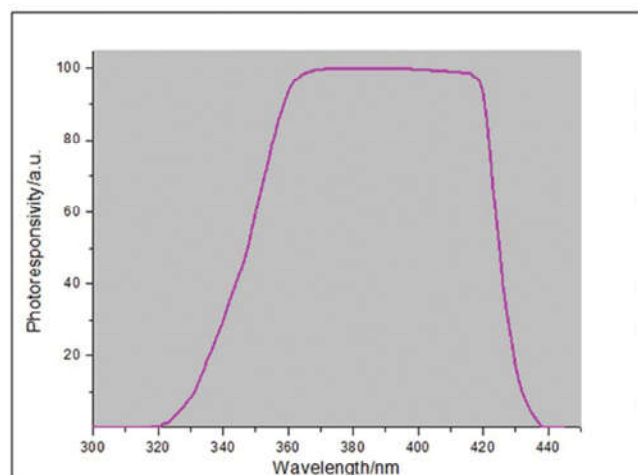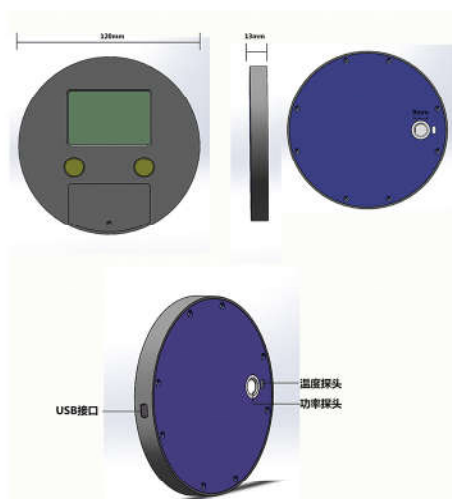

- 气体检测仪
- 色母机，色油机
- 粘度计
- 高温料位计
- UV能量计
- 水质检测仪，采样器
- 干燥箱，培养箱
- 进样瓶
- 电路开发，仪器设计
- 空气过滤器
- 安全光栅

上海梵普仪器有限公司

SHANGHAI FALPLUTE INSTRUMENTS CO., LTD.

服务热线: 1363 6628 368

www.fbochina.com.cn